

Cours du 22 novembre

Couche application

DNS

DNS: domain name system

people: many identifiers:

- SSN, name, passport #

Internet hosts, routers:

- IP address (32 bit) - used for addressing datagrams
- “name”, e.g., www.yahoo.com - used by humans

Domain Name System:

- ❖ *distributed database* implemented in hierarchy of many *name servers*
- ❖ *application-layer protocol:* hosts, name servers communicate to *resolve* names (address/name translation)
 - note: core Internet function, implemented as application-layer protocol
 - complexity at network's “edge”

DNS: services, structure

DNS services

- ❖ hostname to IP address translation
- ❖ host aliasing
 - canonical, alias names
- ❖ mail server aliasing
- ❖ load distribution
 - replicated Web servers: many IP addresses correspond to one name

why not centralize DNS?


- ❖ single point of failure
- ❖ traffic volume
- ❖ distant centralized database
- ❖ maintenance

A: doesn't scale!

DNS Name space

DNS namespace is hierarchical from the root down

- Different parts delegated to different organizations

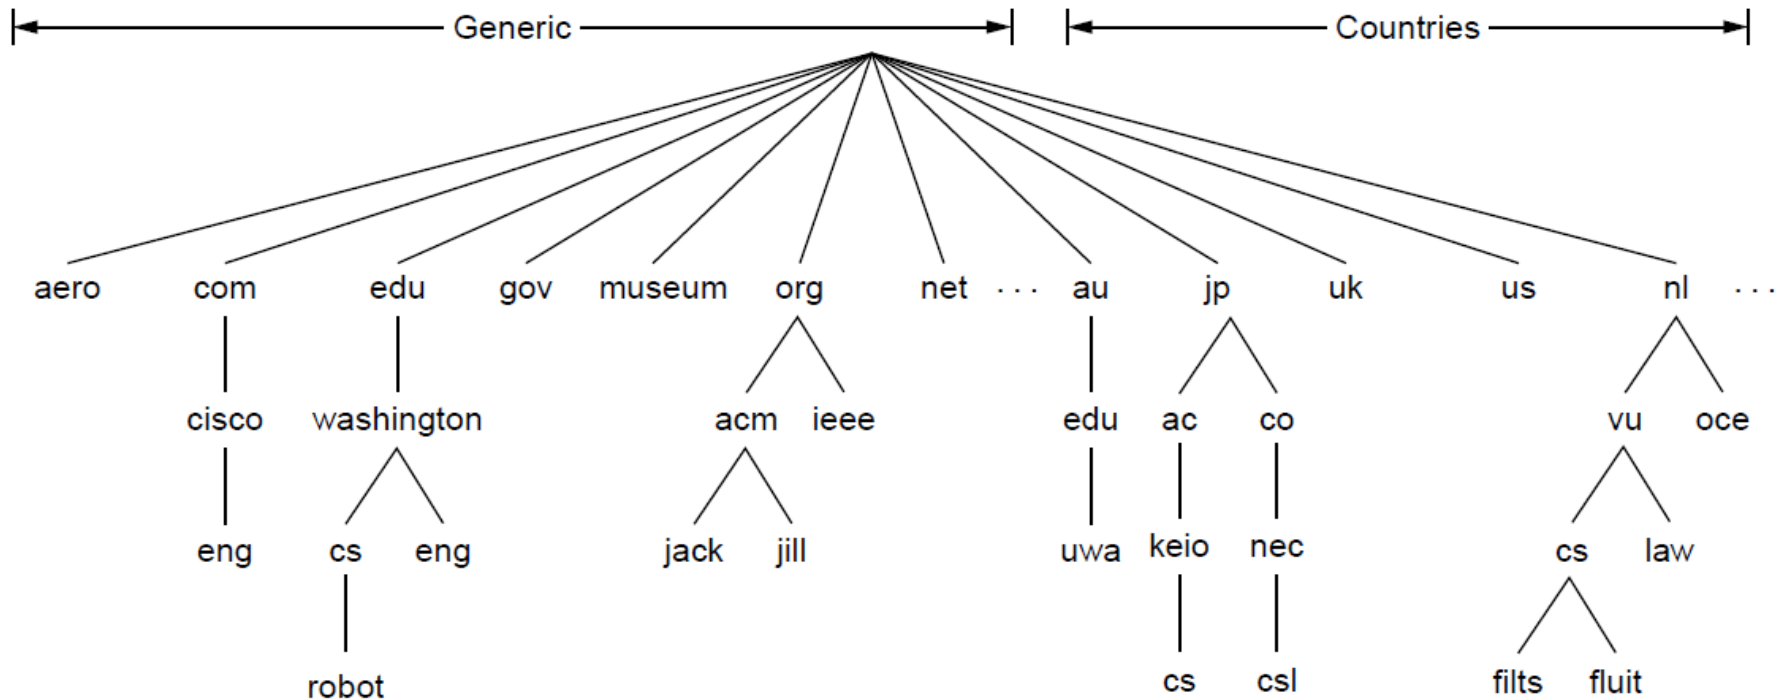

The computer *robot.cs.washington.edu*


DNS Name Space

Generic top-level domains are controlled by ICANN who appoints registrars to run them

Domain	Intended use	Start date	Restricted?
com	Commercial	1985	No
edu	Educational institutions	1985	Yes
gov	Government	1985	Yes
int	International organizations	1988	Yes
mil	Military	1985	Yes
net	Network providers	1985	No
org	Non-profit organizations	1985	No
aero	Air transport	2001	Yes
biz	Businesses	2001	No
coop	Cooperatives	2001	Yes
info	Informational	2002	No
museum	Museums	2002	Yes
name	People	2002	No
pro	Professionals	2002	Yes
cat	Catalan	2005	Yes
jobs	Employment	2005	Yes
mobi	Mobile devices	2005	Yes
tel	Contact details	2005	Yes
travel	Travel industry	2005	Yes
xxx	Sex industry	2010	No

This one was controversial 

DNS: a distributed, hierarchical database

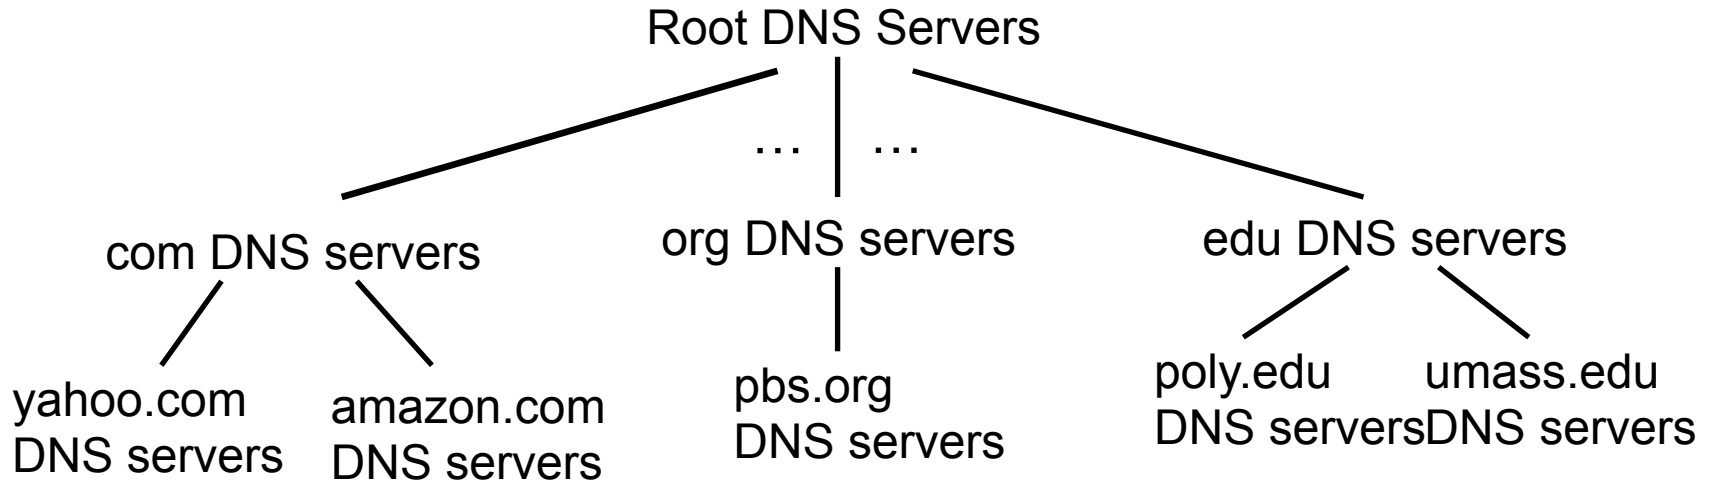


client wants IP for www.amazon.com; 1st approx:

- ❖ client queries root server to find com DNS server
- ❖ client queries .com DNS server to get amazon.com DNS server
- ❖ client queries amazon.com DNS server to get IP address for www.amazon.com

DNS: root name servers

- ❖ contacted by local name server that can not resolve name
- ❖ root name server:
 - contacts authoritative name server if name mapping not known
 - gets mapping
 - returns mapping to local name server

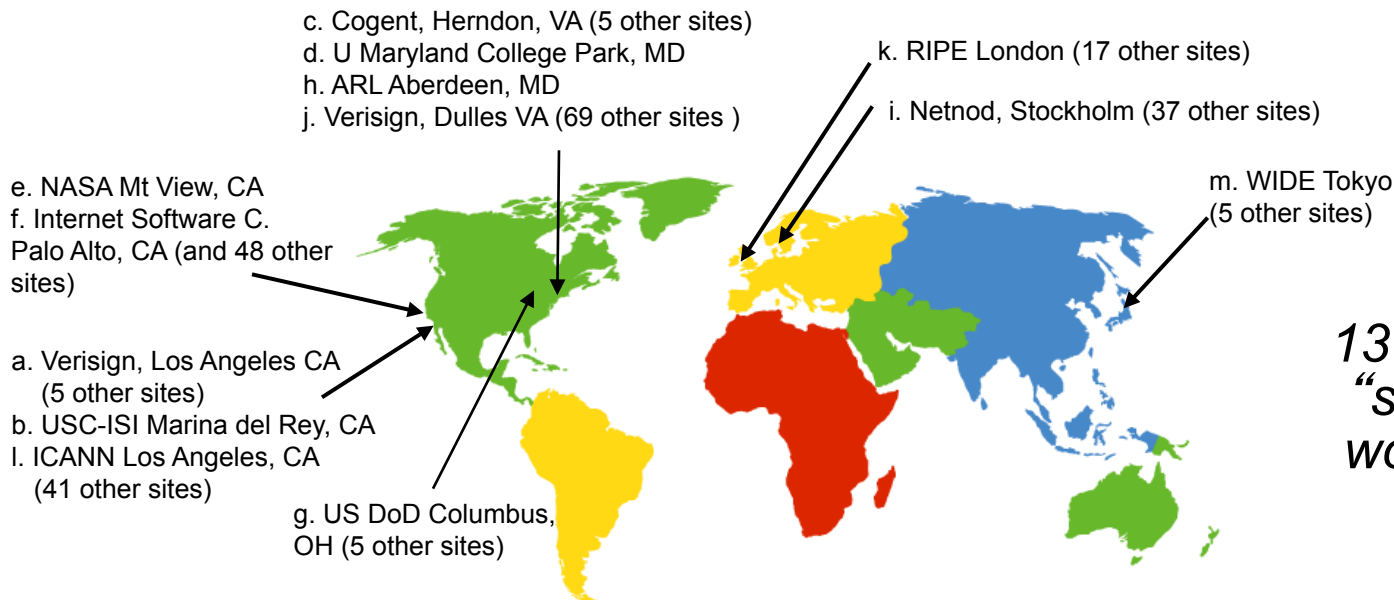

*13 root name
“servers”
worldwide*

TLD, authoritative servers

top-level domain (TLD) servers:

- responsible for com, org, net, edu, aero, jobs, museums, and all top-level country domains, e.g.: uk, fr, ca, jp
- Network Solutions maintains servers for .com TLD
- Educause for .edu TLD

authoritative DNS servers:

- organization's own DNS server(s), providing authoritative hostname to IP mappings for organization's named hosts
- can be maintained by organization or service provider

Local DNS name server


- ❖ does not strictly belong to hierarchy
- ❖ each ISP (residential ISP, company, university) has one
 - also called “default name server”
- ❖ when host makes DNS query, query is sent to its local DNS server
 - has local cache of recent name-to-address translation pairs (but may be out of date!)
 - acts as proxy, forwards query into hierarchy

DNS name resolution example

- ❖ host at `cis.poly.edu` wants IP address for `gaia.cs.umass.edu`

iterated query:


- ❖ contacted server replies with name of server to contact
- ❖ “I don’t know this name, but ask this server”

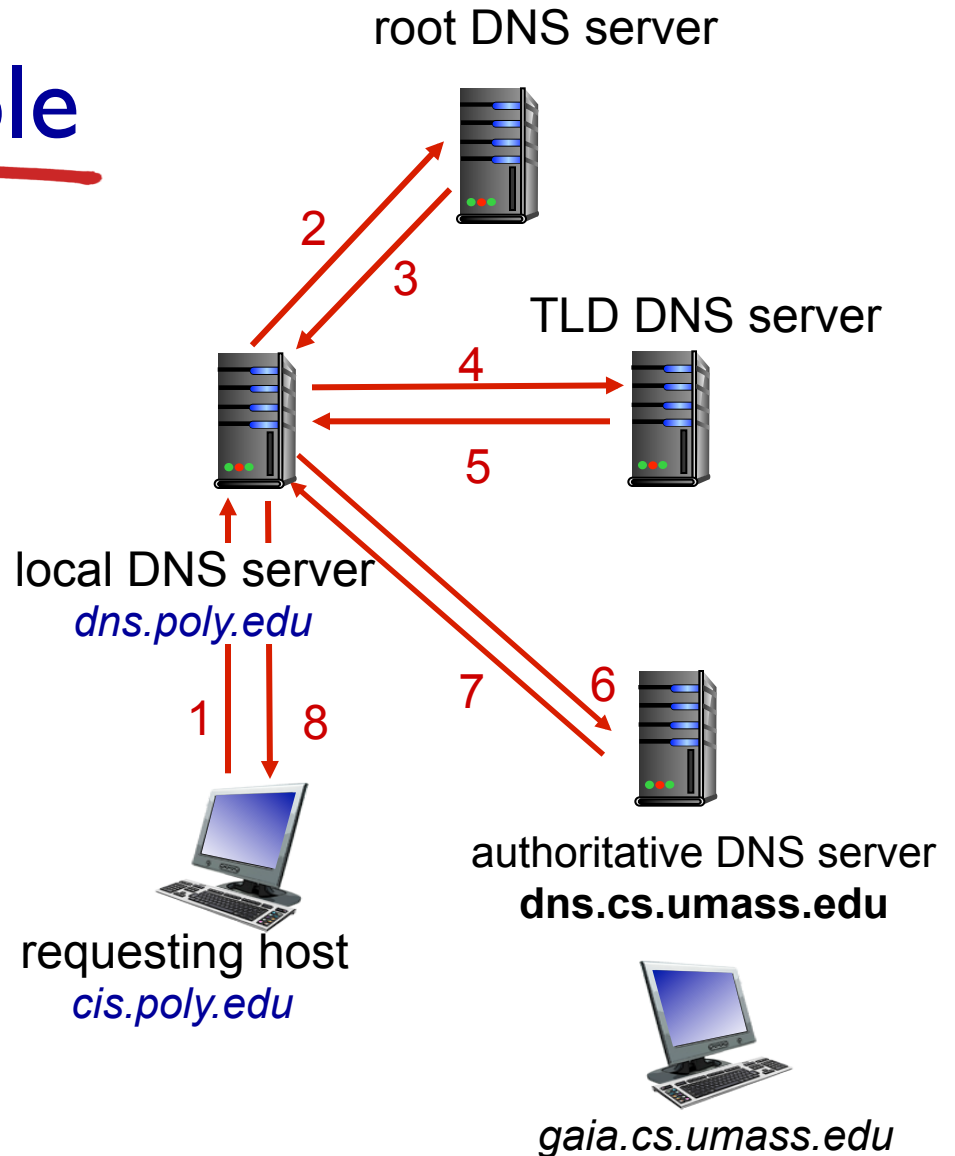

DNS name resolution example

recursive query:

- ❖ puts burden of name resolution on contacted name server
- ❖ heavy load at upper levels of hierarchy?

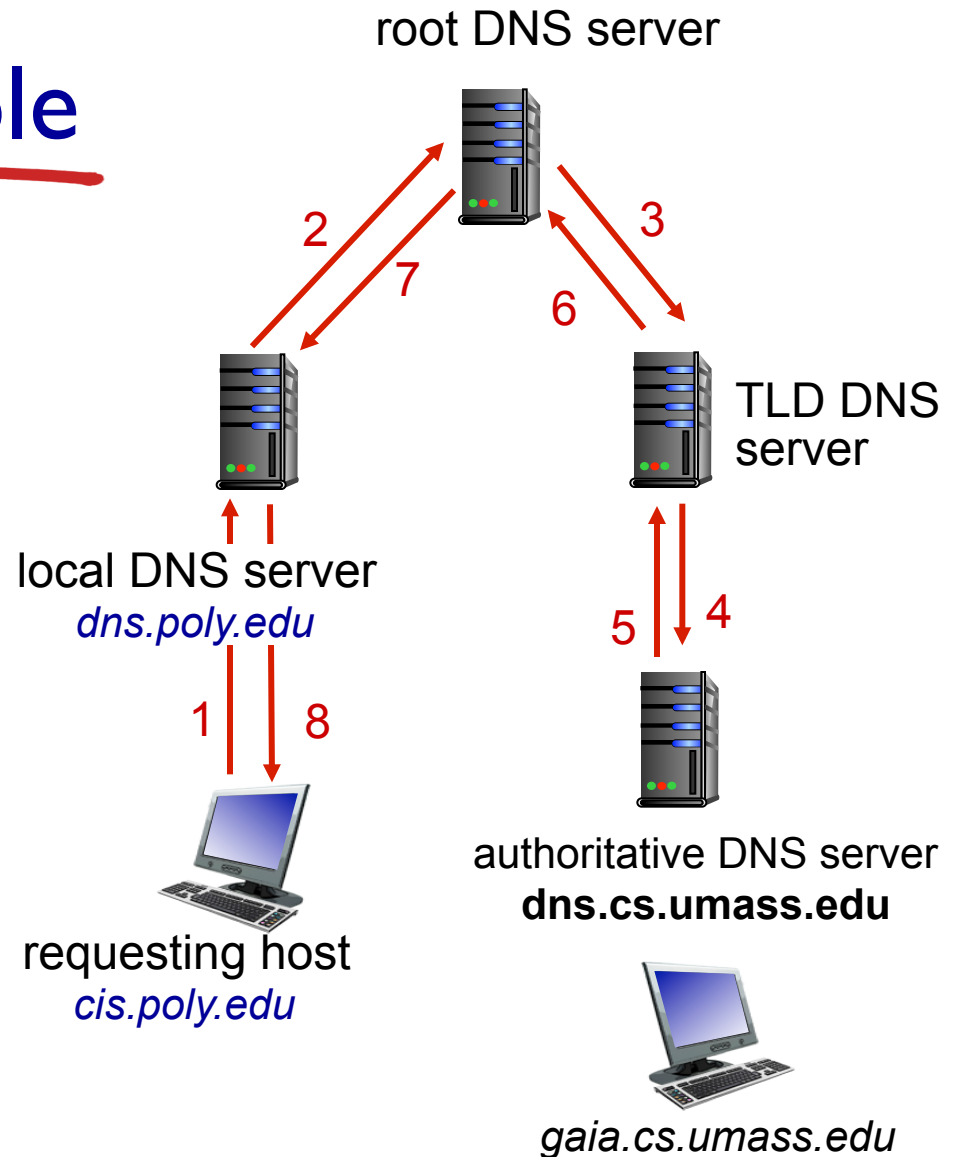

DNS: caching, updating records

- ❖ once (any) name server learns mapping, it *caches* mapping
 - cache entries timeout (disappear) after some time (TTL)
 - TLD servers typically cached in local name servers
 - thus root name servers not often visited
- ❖ cached entries may be *out-of-date* (best effort name-to-address translation!)
 - if name host changes IP address, may not be known Internet-wide until all TTLs expire
- ❖ update/notify mechanisms proposed IETF standard
 - RFC 2136

DNS records

DNS: distributed db storing resource records (RR)

RR format: (name, value, type, ttl)

type=A

- **name** is hostname
- **value** is IP address

type=NS

- **name** is domain (e.g., foo.com)
- **value** is hostname of authoritative name server for this domain

type=CNAME

- **name** is alias name for some “canonical” (the real) name
- `www.ibm.com` is really `servereast.backup2.ibm.com`
- **value** is canonical name

type=MX

- **value** is name of mailserver associated with **name**

Domain Resource Records

The key resource records in the namespace are IP addresses (A/AAAA) and name servers (NS), but there are others too (e.g., MX)

Type	Meaning	Value
SOA	Start of authority	Parameters for this zone
A	IPv4 address of a host	32-Bit integer
AAAA	IPv6 address of a host	128-Bit integer
MX	Mail exchange	Priority, domain willing to accept email
NS	Name server	Name of a server for this domain
CNAME	Canonical name	Domain name
PTR	Pointer	Alias for an IP address
SPF	Sender policy framework	Text encoding of mail sending policy
SRV	Service	Host that provides it
TXT	Text	Descriptive ASCII text

Domain Resource Records

```
; Authoritative data for cs.vu.nl
cs.vu.nl.      86400  IN  SOA    star boss (9527,7200,7200,241920,86400)
cs.vu.nl.      86400  IN  MX     1 zephyr
cs.vu.nl.      86400  IN  MX     2 top
cs.vu.nl.      86400  IN  NS     star

star           86400  IN  A      130.37.56.205
zephyr        86400  IN  A      130.37.20.10
top           86400  IN  A      130.37.20.11
www           86400  IN  CNAME  star.cs.vu.nl
ftp           86400  IN  CNAME  zephyr.cs.vu.nl

flits         86400  IN  A      130.37.16.112
flits         86400  IN  A      192.31.231.165
flits         86400  IN  MX     1 flits
flits         86400  IN  MX     2 zephyr
flits         86400  IN  MX     3 top

rowboat       IN  A      130.37.56.201
              IN  MX     1 rowboat
              IN  MX     2 zephyr

little-sister IN  A      130.37.62.23

laserjet      IN  A      192.31.231.216
```

← Name server


← IP addresses of computers

← Mail gateways

- ❖ A portion of a possible DNS database for cs.vu.nl.

Name Servers

Name servers contain data for portions of the name space called zones (circled).

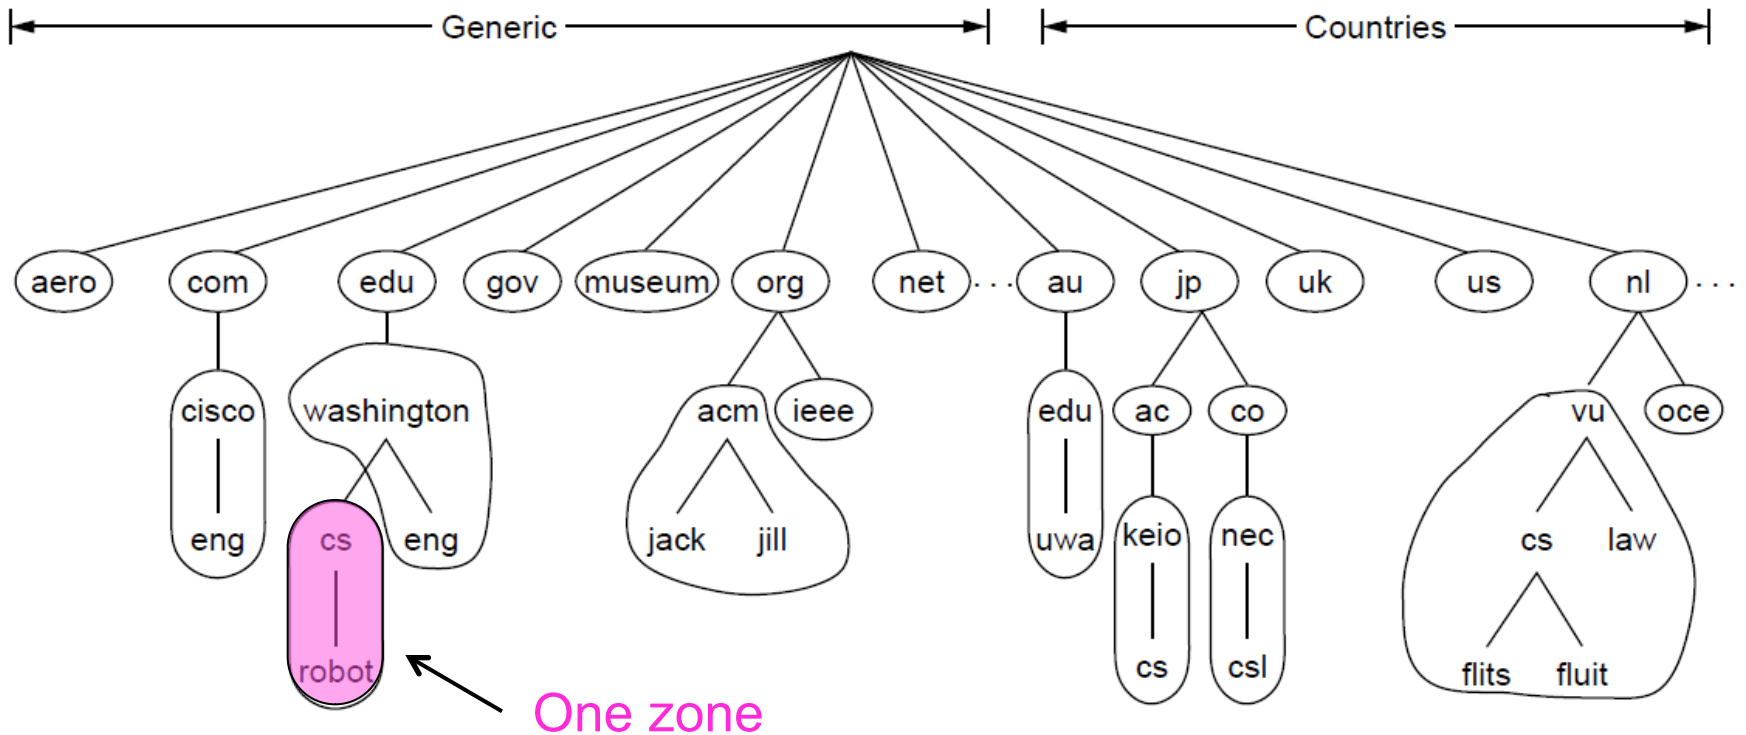


DNS protocol, messages


- ❖ *query* and *reply* messages, both with same *message format*

msg header

- ❖ **identification:** 16 bit # for query, reply to query uses same #
- ❖ **flags:**
 - query or reply
 - recursion desired
 - recursion available
 - reply is authoritative

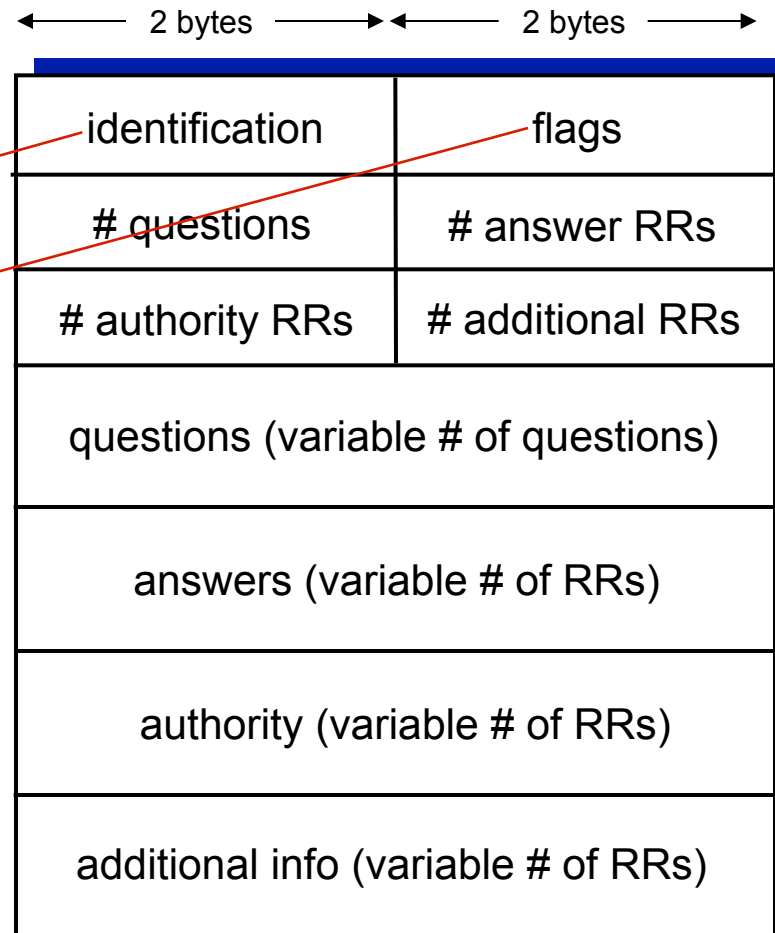

DNS protocol, messages

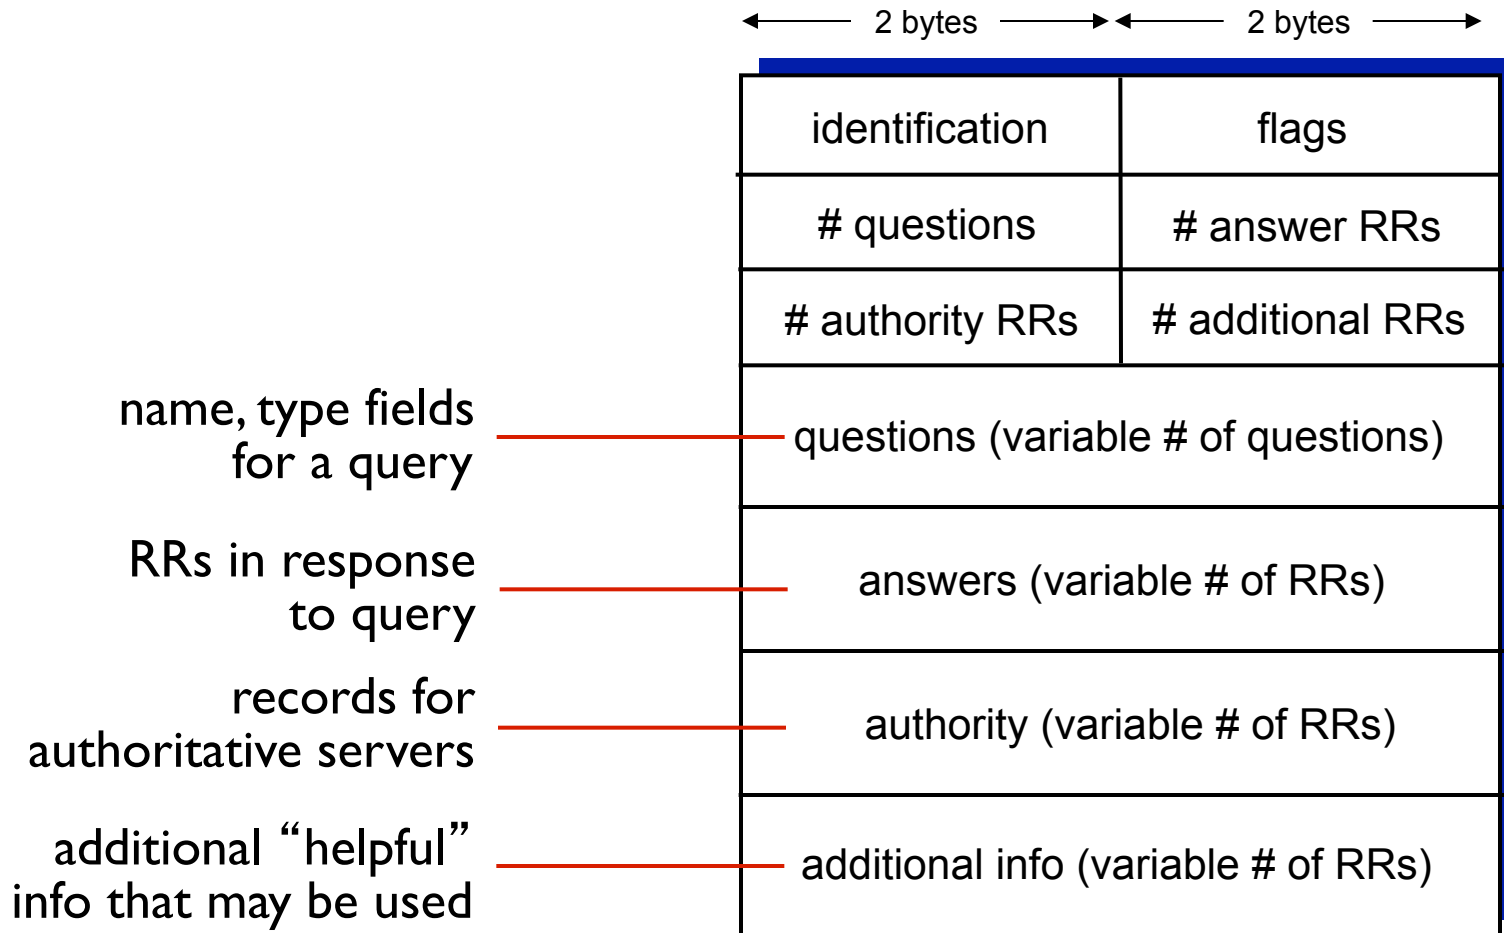

Inserting records into DNS

- ❖ example: new startup “Network Utopia”
- ❖ register name networkutopia.com at *DNS registrar* (e.g., Network Solutions)
 - provide names, IP addresses of authoritative name server (primary and secondary)
 - registrar inserts two RRs into .com TLD server:
(networkutopia.com, dns1.networkutopia.com, NS)
(dns1.networkutopia.com, 212.212.212.1, A)
- ❖ create authoritative server type A record for www.networkutopia.com; type MX record for networkutopia.com

Attacking DNS

DDoS attacks

- ❖ Bombard root servers with traffic
 - Not successful to date
 - Traffic Filtering
 - Local DNS servers cache IPs of TLD servers, allowing root server bypass
- ❖ Bombard TLD servers
 - Potentially more dangerous

Redirect attacks

- ❖ Man-in-middle
 - Intercept queries
- ❖ DNS poisoning
 - Send bogus replies to DNS server, which caches

Exploit DNS for DDoS

- ❖ Send queries with spoofed source address: target IP
- ❖ Requires amplification


Couche application

electronic mail

- SMTP, POP3, IMAP


Architecture et Services

The key components and steps (numbered) to send email

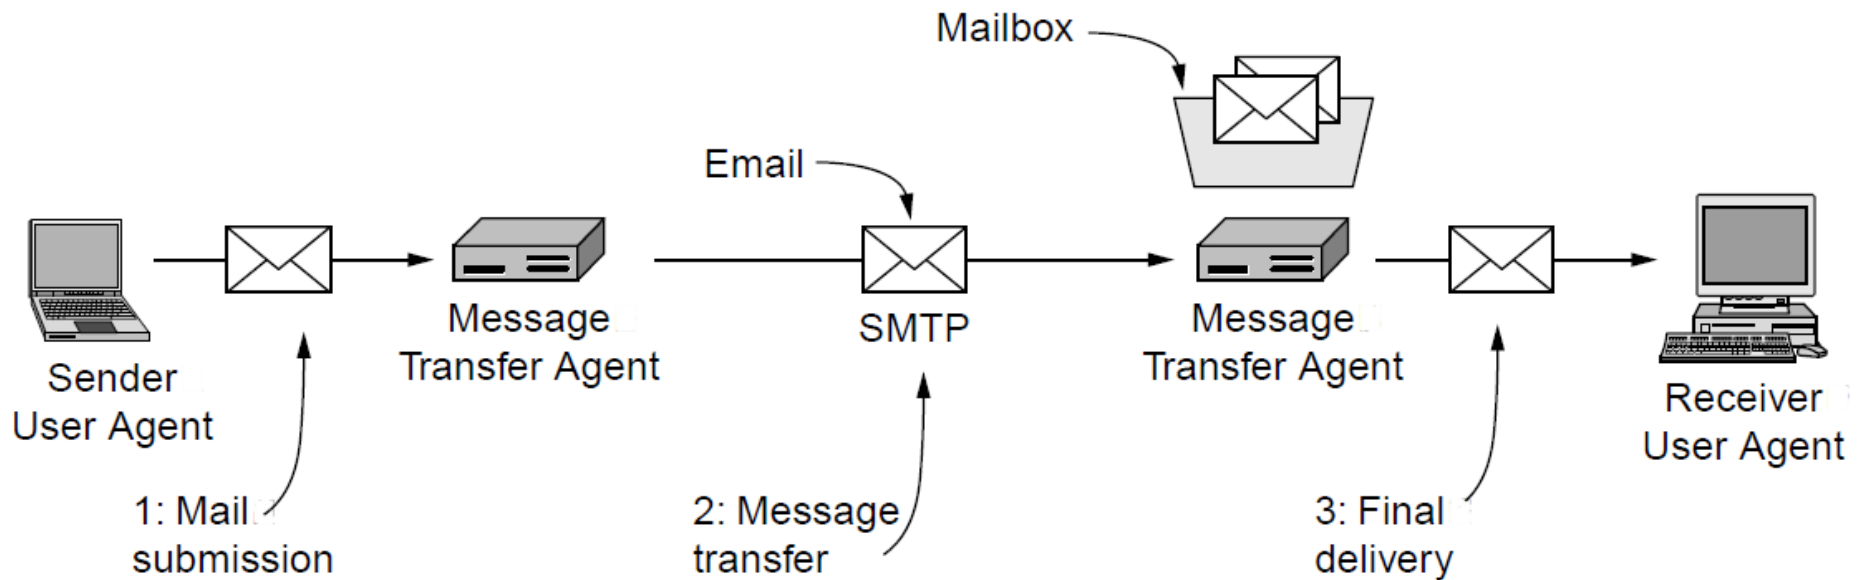

Architecture of the email system

Architecture and Services (2)

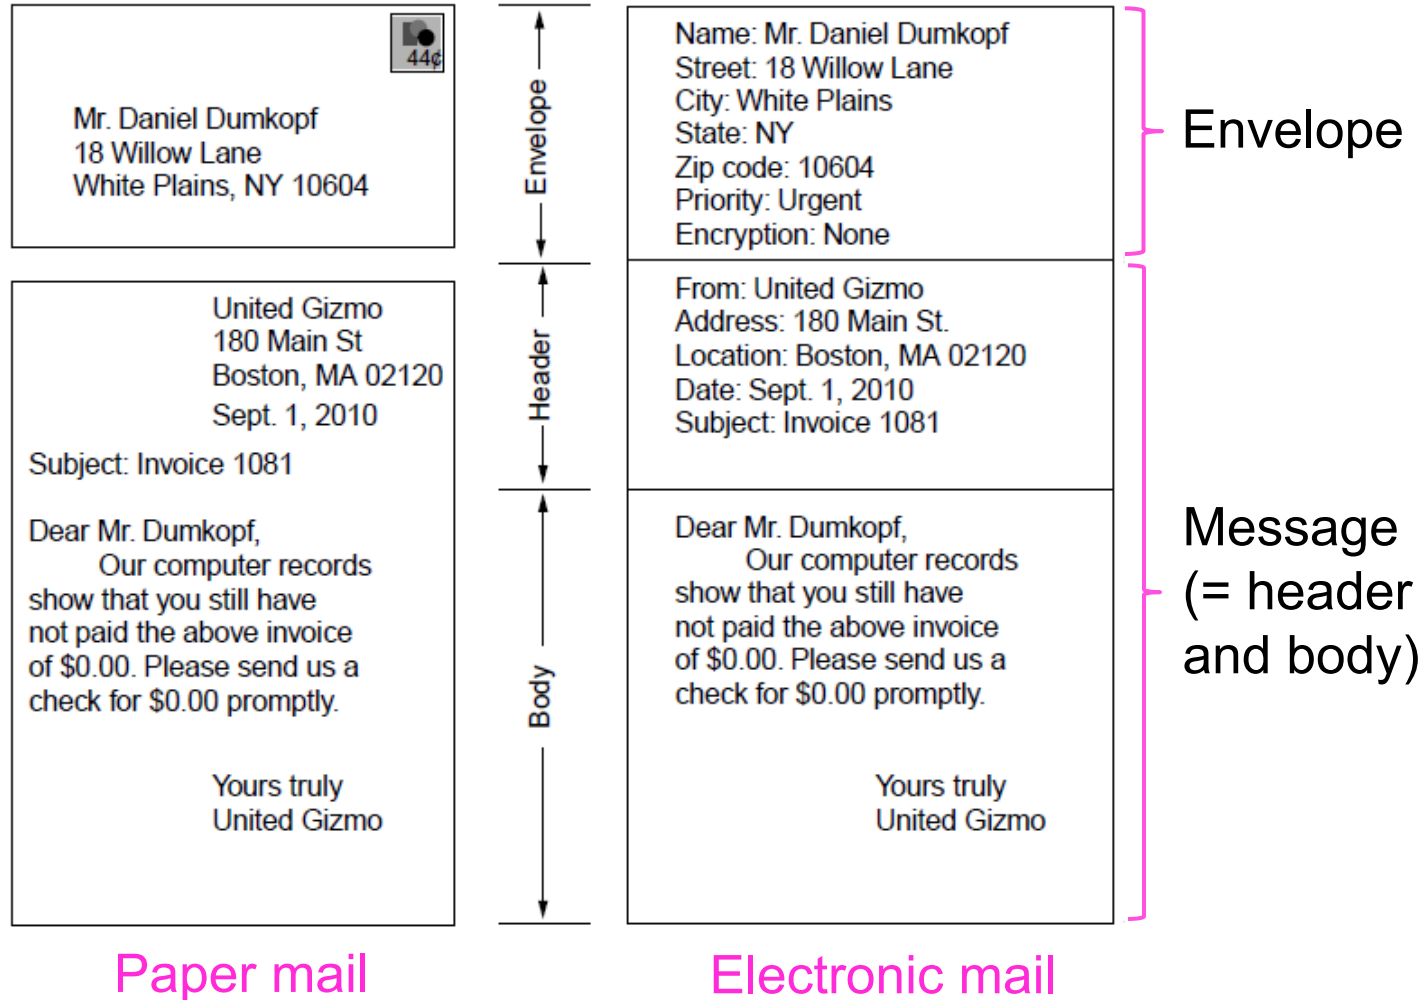

The User Agent

What users see – interface elements of a typical user agent

Message folders

Mail Folders
All items
Inbox
Networks
Travel
Junk Mail

Message summary

From		Subject	Received
trudy	✉	Not all Trudys are nasty	Today
Andy	📎	Material on RFID privacy	Today
djw	!	Have you seen this?	Mar 4
Amy N. Wong		Request for information	Mar 3
guido		Re: Paper acceptance	Mar 3
lazowska		More on that	Mar 2
lazowska	📎	New report out	Mar 2
...	

Search 🔍

Mailbox search

A. Student	Graduate studies?	Mar 1
Dear Professor, I recently completed my undergraduate studies with distinction at an excellent university. I will be visiting your		
...

Message


Electronic mail

Three major components:

- ❖ user agents
- ❖ mail servers
- ❖ simple mail transfer protocol: SMTP

User Agent


- ❖ a.k.a. “mail reader”
- ❖ composing, editing, reading mail messages
- ❖ e.g., Outlook, Thunderbird, iPhone mail client
- ❖ outgoing, incoming messages stored on server

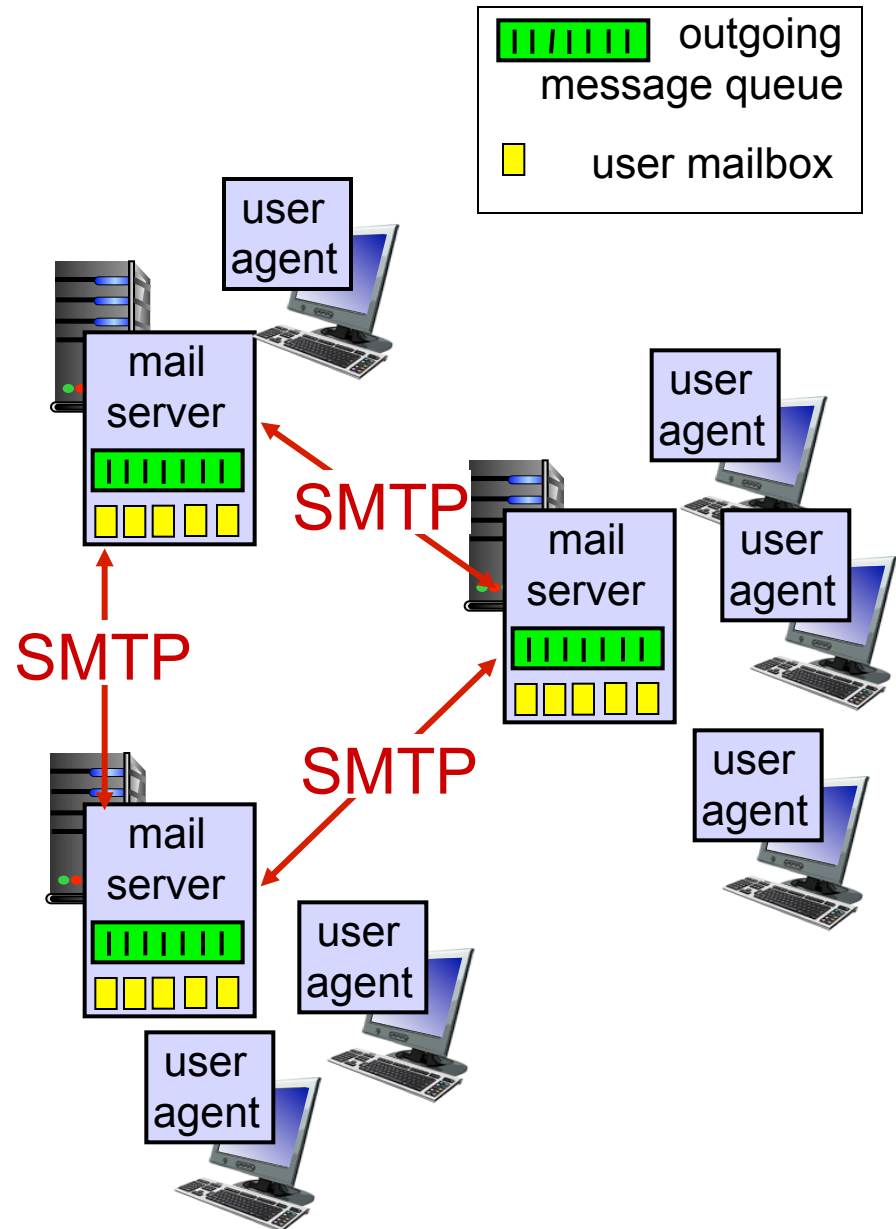

Electronic mail: mail servers

mail servers:

- ❖ *mailbox* contains incoming messages for user
- ❖ *message queue* of outgoing (to be sent) mail messages
- ❖ *SMTP protocol* between mail servers to send email messages
 - client: sending mail server
 - “server”: receiving mail server

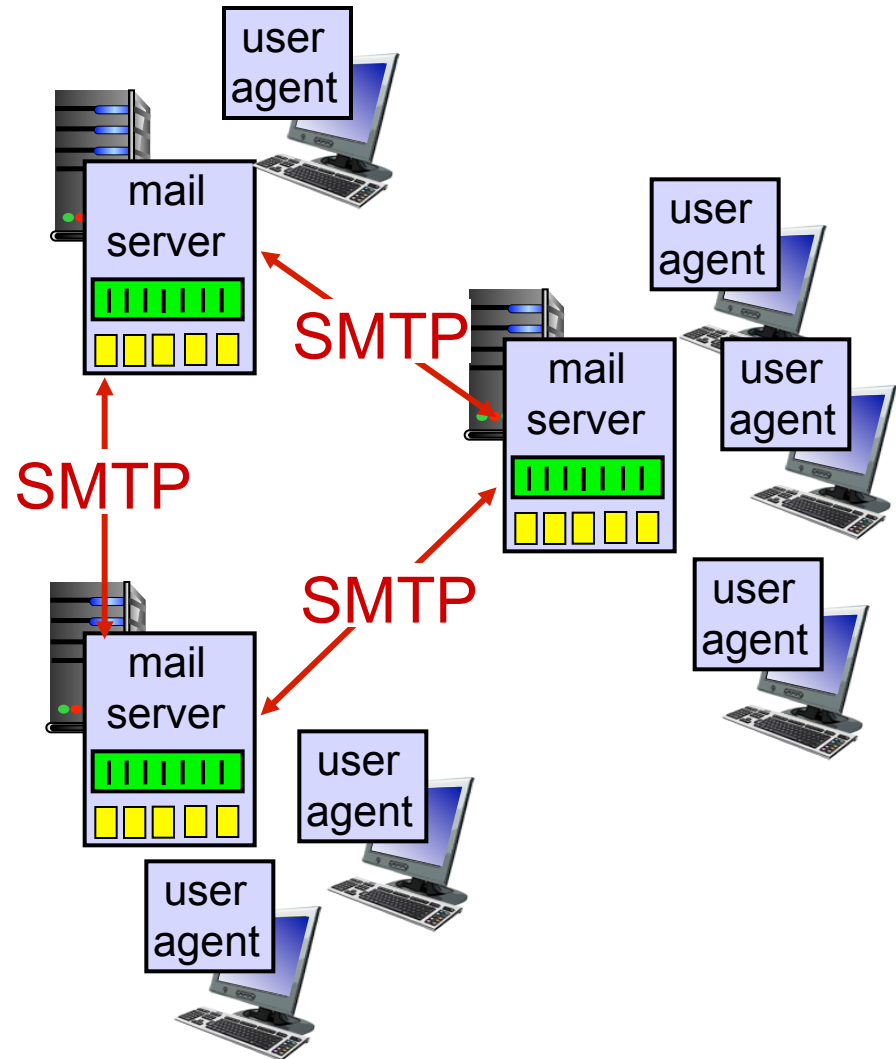


Electronic Mail: SMTP [RFC 2821]

- ❖ uses TCP to reliably transfer email message from client to server, port 25
- ❖ direct transfer: sending server to receiving server
- ❖ three phases of transfer
 - handshaking (greeting)
 - transfer of messages
 - closure
- ❖ command/response interaction (like HTTP, FTP)
 - **commands:** ASCII text
 - **response:** status code and phrase
- ❖ messages must be in 7-bit ASCII

Scenario: Alice sends message to Bob

- 1) Alice uses UA to compose message "to" bob@someschool.edu
- 2) Alice's UA sends message to her mail server; message placed in message queue
- 3) client side of SMTP opens TCP connection with Bob's mail server
- 4) SMTP client sends Alice's message over the TCP connection
- 5) Bob's mail server places the message in Bob's mailbox
- 6) Bob invokes his user agent to read message

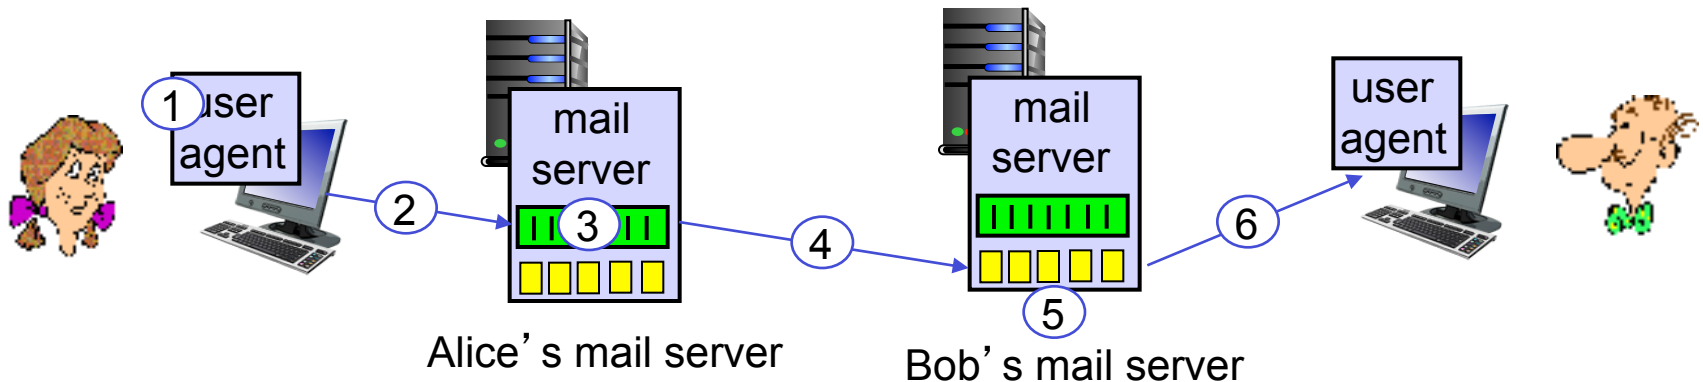

Sample SMTP interaction

```
S: 220 hamburger.edu
C: HELO crepes.fr
S: 250 Hello crepes.fr, pleased to meet you
C: MAIL FROM: <alice@crepes.fr>
S: 250 alice@crepes.fr... Sender ok
C: RCPT TO: <bob@hamburger.edu>
S: 250 bob@hamburger.edu ... Recipient ok
C: DATA
S: 354 Enter mail, end with "." on a line by itself
C: Do you like ketchup?
C: How about pickles?
C: .
S: 250 Message accepted for delivery
C: QUIT
S: 221 hamburger.edu closing connection
```

Try SMTP interaction for yourself:

- ❖ `telnet servername 25`
- ❖ see 220 reply from server
- ❖ enter HELO, MAIL FROM, RCPT TO, DATA, QUIT commands

above lets you send email without using email client (reader)

SMTP: final words

- ❖ SMTP uses persistent connections
- ❖ SMTP requires message (header & body) to be in 7-bit ASCII
- ❖ SMTP server uses CRLF.CRLF to determine end of message

comparison with HTTP:

- ❖ HTTP: pull
- ❖ SMTP: push
- ❖ both have ASCII command/response interaction, status codes
- ❖ HTTP: each object encapsulated in its own response msg
- ❖ SMTP: multiple objects sent in multipart msg

Mail message format

SMTP: protocol for exchanging email msgs

RFC 822: standard for text message format:


❖ header lines, e.g.,

- To:
- From:
- Subject:


different from SMTP MAIL FROM, RCPT TO: commands!

❖ Body: the “message”

- ASCII characters only

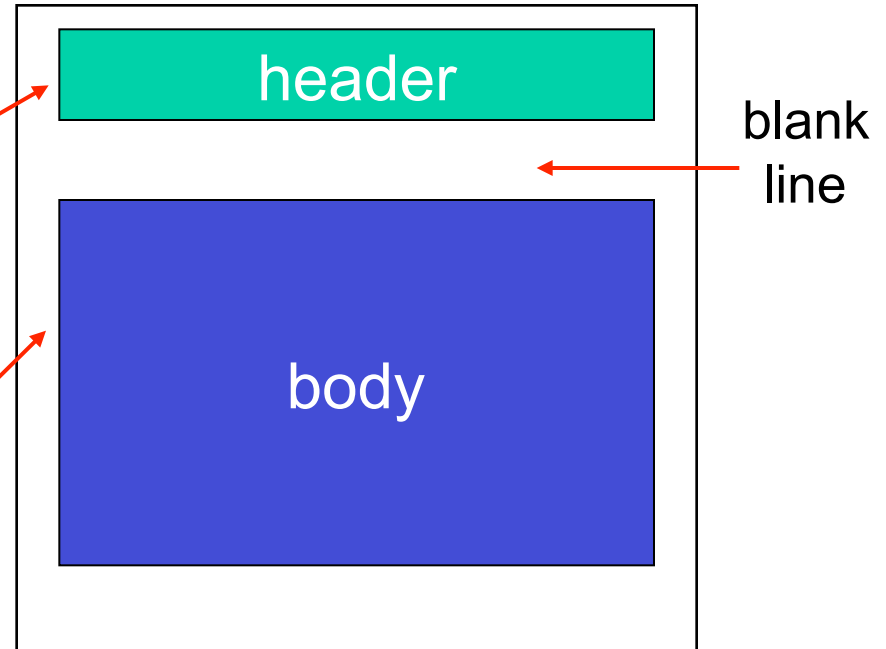

Mail access protocols

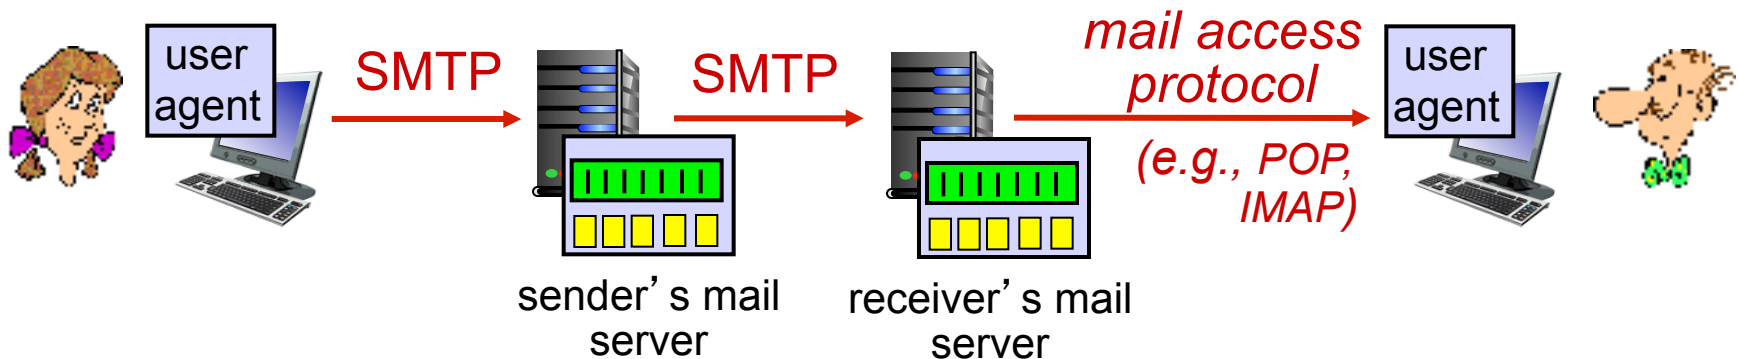

- ❖ **SMTP**: delivery/storage to receiver's server
- ❖ mail access protocol: retrieval from server
 - **POP**: Post Office Protocol [RFC 1939]: authorization, download
 - **IMAP**: Internet Mail Access Protocol [RFC 1730]: more features, including manipulation of stored msgs on server
 - **HTTP**: gmail, Hotmail, Yahoo! Mail, etc.

POP3 protocol

authorization phase

- ❖ client commands:
 - **user**: declare username
 - **pass**: password
- ❖ server responses
 - **+OK**
 - **-ERR**

transaction phase, client:

- ❖ **list**: list message numbers
- ❖ **retr**: retrieve message by number
- ❖ **dele**: delete
- ❖ **quit**

```
S: +OK POP3 server ready
C: user bob
S: +OK
C: pass hungry
S: +OK user successfully logged on
```

```
C: list
S: 1 498
S: 2 912
S: .
C: retr 1
S: <message 1 contents>
S: .
C: dele 1
C: retr 2
S: <message 1 contents>
S: .
C: dele 2
C: quit
S: +OK POP3 server signing off
```

POP3 (more) and IMAP

more about POP3

- ❖ previous example uses POP3 “download and delete” mode
 - Bob cannot re-read e-mail if he changes client
- ❖ POP3 “download-and-keep”: copies of messages on different clients
- ❖ POP3 is stateless across sessions

IMAP

- ❖ keeps all messages in one place: at server
- ❖ allows user to organize messages in folders
- ❖ keeps user state across sessions:
 - names of folders and mappings between message IDs and folder name